

NELED4205

COB IP67 in-ground light



Honeycomb_louwer version (NELED4205(R)L)



APPLICATIONS

- Outdoor decorative lighting
- Paths
- Squares and parks

TECHNICAL DETAILS

- CREE LEDs
- Rated life: 30,000 hours

OPTIONS


- **Driver:** Choice of separate DC 24V IP65 driver (separate driver not included)
- **Connector:** Choice of two types of IP67 connector, straight (type I) or T (type T)
- **Cover:** Choice of tempered glass cover or honeycomb_louwer



CONSTRUCTION

- Die-cast aluminium housing
- 316 brushed stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- Weight limit: 917kg on area Ø10mm, 2000kg on area Ø30mm, 2000kg on area Ø60mm
- Complete with a IP67 cable gland, and pre-wired with 2x1.00mm² H05RN wire (DC24V) or 3x1.00mm² H05RN wire (110-240V)

NELED4205/R

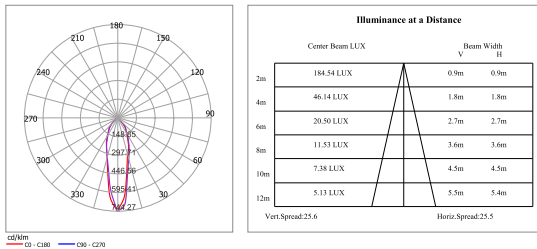

| Model | LED Chip | Watts | Colour temp. | Lumens | CRI |
|------------|----------|-------|--------------|--------|-----|
| NELED4205 | 1x6WCOB | 6.5W | 3000K | 529 lm | >80 |
| NELED4205 | 1x6WCOB | 6.5W | 3000K | 529 lm | >80 |
| NELED4205R | 1x6WCOB | 6.5W | 3000K | 529 lm | >80 |
| NELED4205R | 1x6WCOB | 6.5W | 3000K | 529 lm | >80 |

| Accessories | Driver |
|----------------------------------|----------------------------------|
| CNI02 2pin type I IP67 connector | CNT02 2pin type T IP67 connector |
| CNI03 3pin type I IP67 connector | CNT03 3pin type T IP67 connector |
| CNI04 4pin type I IP67 connector | CNT04 4pin type T IP67 connector |
| CNI05 5pin type I IP67 connector | CNT05 5pin type T IP67 connector |

