

# NELED4501C

Rectangle IP67 in-ground light



Supplied complete with external IP67 enclosure for mains driver



For remote 24V driver, enclosure is to be supplied by installer



45°/35°



### APPLICATIONS

- Outdoor decorative lighting
- Paths
- Squares and parks

### TECHNICAL DETAILS

- OSRAM LEDs
- Rated life: 30,000 hours


### OPTIONS

- **Driver:** Choice of separate DC 24V IP65 driver (separate driver not included)
- **Connector:** Choice of two types of IP67 connector, straight (type I) or T (type T)



### CONSTRUCTION

- Die-cast aluminium housing
- 316 brushed stainless steel bezel
- Tempered glass cover 8mm thick
- PVC mounting sleeve
- LED driver included with 110-240V versions only
- Weight limit: 917kg on area Ø10mm, 1285kg on area Ø30mm, 2000kg on area Ø60mm
- Complete with a IP67 cable gland, and pre-wired with 2x1.00mm<sup>2</sup> H05RN wire (DC24V) or 3x1.00mm<sup>2</sup> H05RN wire (110-240V)

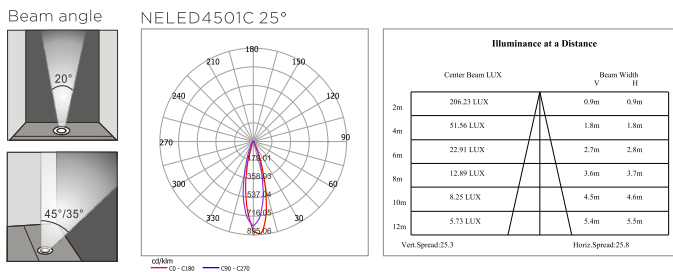

Model	LED Chip	Watts	Colour temp.	Lumens	CRI	Beam angle
NELED4501C	3x2W	7W	3000K	333 lm	>80	20°
NELED4501C	3x2W	7W	6000K	508 lm	>80	20°
NELED4501C	3x2W	7W	3000K	285 lm	>80	45°/35°
NELED4501C	3x2W	7W	6000K	400 lm	>80	45°/35°

Accessories	Driver
CNI02 2pin type I IP67 connector	CNT02 2pin type T IP67 connector
CNI03 3pin type I IP67 connector	CNT03 3pin type T IP67 connector
CNI04 4pin type I IP67 connector	CNT04 4pin type T IP67 connector
CNI05 5pin type I IP67 connector	CNT05 5pin type T IP67 connector

