

NFDLED253

COB LED flood lights



Optional PIR sensor



100W



200W



APPLICATIONS

- Area lighting
- Wall washing
- Driveway lighting
- Security lighting
- Landscape lighting

TECHNICAL DETAILS

- COB LEDs
- Rated life: 30,000 hours


OPTIONS

- **Sensor:** Optional PIR sensor


CONSTRUCTION

- Die-casting aluminium housing
- 6063 Aluminium reflector
- Powder coated surface treatment (RAL9007)
- LED driver included
- Complete with a IP65 cable gland, and pre-wired 3x1.0mm² HO5RN
- Weight and windage:
 - 50W, 1.56kg, 0.06m²
 - 100W, 3.45kg, 0.12m²
 - 150W, 4.9kg, 0.16m²
 - 200W, 7.47kg, 0.22m²


NFDLED253 100W



NFDLED253 150W

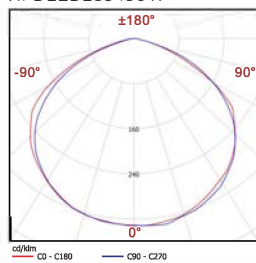

Model	Watts	Colour temp.	Lumens	CRI
NFDLED253 50W	50W	3000K/4000K/6000K	4,920 lm	>70
NFDLED253 100W	100W	3000K/4000K/6000K	9,250 lm	>70
NFDLED253 150W	150W	3000K/4000K/6000K	13,560 lm	>70
NFDLED253 200W	200W	3000K/4000K/6000K	18,650 lm	>70

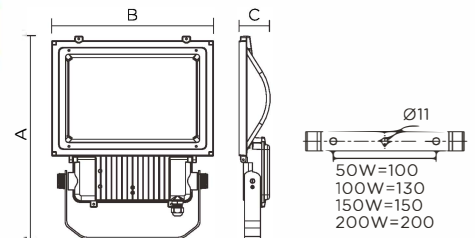

Watts	A	B	C
50W	291	230	58
100W	381	312	62
150W	444	353	66
200W	515	420	87