

# NFLED4011

Landscape flood lights



NFLED4011-1



NFLED4011



### APPLICATIONS

- Lawns and gardens
- Paths

### TECHNICAL DETAILS


- Osram LEDs
- Rated life: 30,000 hours

### CONSTRUCTION

- Aluminium body with anodized finish
- Tempered glass 3mm thick
- LED driver included with 110-240V versions only
- Supplied complete mounting plate (for surface mounting) and spike (for ground mounting)

### OPTIONS

- **Driver:** 110-240V versions supplied complete with built-in driver. For 24V versions, the driver must be ordered as a separate item, listed below

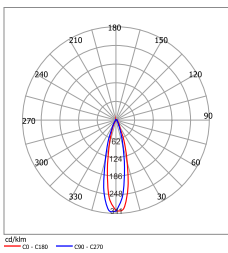


Distance	Illuminance at a Distance	
	Center Beam LUX	Beam Width V H
2m	76.88LUX	0.90m 0.90m
4m	19.22LUX	1.80m 1.80m
6m	8.54LUX	2.70m 2.70m
8m	4.81LUX	3.60m 3.60m
10m	3.08LUX	4.50m 4.50m
12m	2.14LUX	5.40m 5.40m

Vert. Spread: 25.4 Horiz. Spread: 25.4

Model	Input	LED Chip	Watts	Colour temp.	Lumens	CRI
NFLED4011	DC24/110-240V	1x2WCOB	3.5W	3000K	120lm	>80
NFLED4011	DC24/110-240V	1x2WCOB	3.5W	6000K	150lm	>80
NFLED4011-1	DC24/110-240V	1x2WCOB	3.5W	3000K	120lm	>80
NFLED4011-1	DC24/110-240V	1x2WCOB	3.5W	6000K	150lm	>80

### Driver

NLED-DV110\* (see page 127)

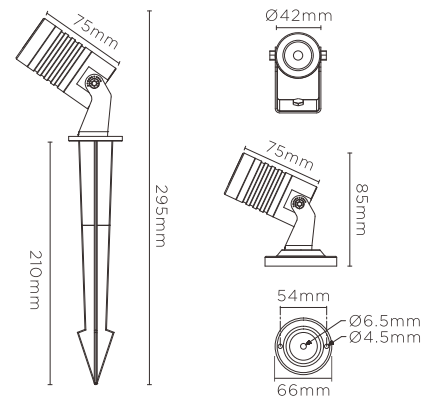

NFLED4011-1

NFLED4011