

NFLED5012

Landscape flood lights



NFLED5012



NFLED5012A



APPLICATIONS


- Lawns and gardens
- Paths

CONSTRUCTION

- Die-cast aluminium housing
- Powder coated surface treatment
- Tempered glass
- LED driver included
- Complete with twin IP65 cable glands, and pre-wired with 3x1.0mm² H05RN wire
- Supplied for spike mounting, supplied complete with spike
- Choice of three finishes:
 - Black (similar to RAL 7021)
 - Dark grey (similar to RAL 7037)
 - Light grey (similar to RAL 7023)

TECHNICAL DETAILS

- CREE LEDs
- Rated life: 30,000 hours

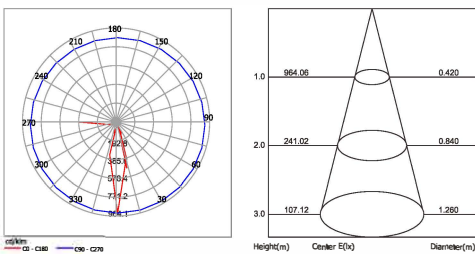

Model	LED Chip	Watts	Colour temp.	Lumens	CRI
NFLED5012	1x7W COB	9W	3000K	3,16 lm	>80
NFLED5012	1x7W COB	9W	6000K	3,48 lm	>80
NFLED5012A	3x2W	6.5W	3000K	2,40 lm	>80
NFLED5012A	3x2W	6.5W	6000K	2,66 lm	>80

