

NLED119 series

Adjustable LED spotlights



NLED119*DL (Aluminium bezel)



NLED119*D (Polycarbonate bezel)



APPLICATIONS

- Hotels
- Retail stores
- Bars and restaurants
- Residential area

TECHNICAL DETAILS

- COB LED
- Dimming: Step-dimming as standard
- Rated life: 30,000 hours
- **Dimming:** Step-dimming as standard, switch on/off quickly to step between 100%, 50% or 20% output

CONSTRUCTION

- Polycarbonate housing and rear cover
- Polycarbonate or aluminium bezel
- Polycarbonate lens
- Adjustable angle 30°
- Integrated driver


OPTIONS

- **Bezel material:** Choice of PC or aluminium (suffix L)
- **Beam angle:** Choice of 15° or 24°
- **Size:** Sizes vary by wattage, as listed below.


The 3.5W aluminium-bezel version is available in two sizes. The 3.5W PC-bezel version is available in just one size:

- 3.5W aluminium bezel small, use suffix DLS
- 3.5W aluminium bezel large, use suffix DL
- 3.5W PC bezel small, use suffix DS (suffix explained: D for adjustable, L for aluminium, S for small)

Model	Colour temp.	Lumens	CIR	PF	Beam angle
NLED1193DL 3.5W	3000K/4000K/5700K	260 lm	>90	>0.5	15°/24°
NLED1195DL 5W	3000K/4000K/5700K	375 lm	>90	>0.5	15°/24°
NLED1197DL 8W	3000K/4000K/5700K	600 lm	>90	>0.8	15°/24°
NLED1199DL 10W	3000K/4000K/5700K	700 lm	>90	>0.8	15°/24°
NLED1193DLS 3.5W	3000K/4000K/5700K	260 lm	>90	>0.5	15°/24°
NLED1193D 3.5W	3000K/4000K/5700K	260 lm	>90	>0.5	15°/24°
NLED1195D 5W	3000K/4000K/5700K	375 lm	>90	>0.5	15°/24°
NLED1197D 8W	3000K/4000K/5700K	600 lm	>90	>0.8	15°/24°
NLED1199D 10W	3000K/4000K/5700K	700 lm	>90	>0.8	15°/24°
NLED1193DS 3.5W	3000K/4000K/5700K	260 lm	>90	>0.5	15°/24°

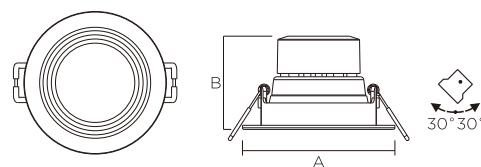

Watts	A	B	Cut-out
3.5W(S)	Ø70	53	Ø55
3.5W/5W	Ø93	56	Ø75
8W/10W	Ø116	66	Ø95

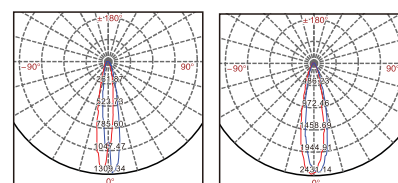

NLED1193D 3.5W 15° NLED1199D 10W 24°