

NLED19 series

Recessed die-cast aluminium
COB LED spotlights



NLED19*



NLED19*D



24°



220-240V



IP20



APPLICATIONS

- Hotels
- Shopping malls
- Retail stores
- Residential lighting

TECHNICAL DETAILS

- COB LED
- Rated life: 30,000 hours


CONSTRUCTION

- Die-cast aluminium housing and heat sink
- Powder coated finish
- Anodized aluminium reflector
- Adjustable angle 30°
- Separate driver included


OPTIONS

- **Bezel:** Choice fixed or gimbal (use suffix D)
- **Emergency:** 1.5 hours or 3 hours emergency kit (EM001/002) available. Please refer to the driver section


Model	Colour temp.	Lumens	CRI	PF
NLED191 4W	3000K/4000K/5700K	260 lm	>90	>0.5
NLED191D 4W	3000K/4000K/5700K	260 lm	>90	>0.5
NLED191 6W	3000K/4000K/5700K	400 lm	>90	>0.7
NLED191D 6W	3000K/4000K/5700K	400 lm	>90	>0.7
NLED192 9W	3000K/4000K/5700K	600 lm	>90	>0.7
NLED192D 9W	3000K/4000K/5700K	600 lm	>90	>0.7
NLED192 12W	3000K/4000K/5700K	800 lm	>90	>0.9
NLED192D 12W	3000K/4000K/5700K	800 lm	>90	>0.9

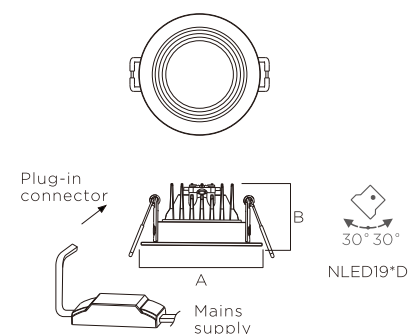

Model	A	B	Cut-out
NLED191	Ø72	48	Ø62
NLED191D	Ø82	48	Ø75
NLED192	Ø96	63	Ø85
NLED192D	Ø106	63	Ø95



NLED192 9W 24°



NLED192 12W 24°