

NLED583 series

High power multiple down lights



NLED5833



NLED5831



NLED5832



APPLICATIONS

- Shopping malls
- Showrooms
- Fashion shops
- Lobbies

TECHNICAL DETAILS



- COB LEDs
- Rated life: 30,000 hours

CONSTRUCTION

- Die-cast aluminium bezel
- Anodized aluminium reflector
- Steel housing
- Semi-white powder coated finish
- Adjustable angle 40°
- One-head, two-head and three-head designs
- Separate driver for each head included


OPTIONS

- Beam angle: Choice of 15°, or 24°

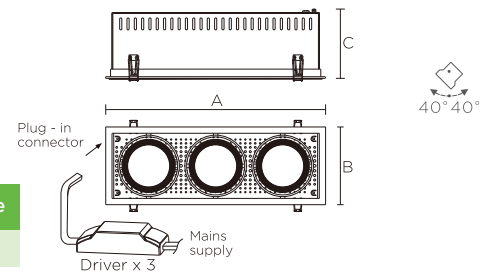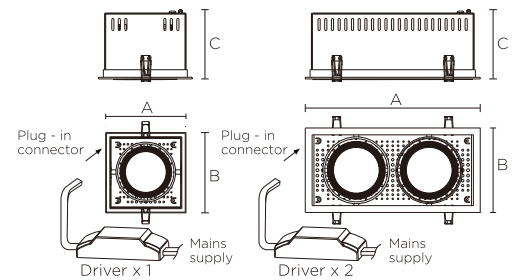


Model	Colour temp.	Lumens	CRI	PF	Beam angle
NLED5831 24W	3000K/3500K/4000K/5700K	2,100 lm	>90	>0.9	15°/24°
NLED5832 2x24W	3000K/3500K/4000K/5700K	3,500 lm	>90	>0.9	15°/24°
NLED5833 3x24W	3000K/3500K/4000K/5700K	5,000 lm	>90	>0.9	15°/24°
NLED5831A 35W	3000K/3500K/4000K/5700K	2,600 lm	>90	>0.9	15°/24°
NLED5832A 2x35W	3000K/3500K/4000K/5700K	5,100 lm	>90	>0.9	15°/24°
NLED5833A 3x35W	3000K/3500K/4000K/5700K	7,600 lm	>90	>0.9	15°/24°

Watts	A	B	C	Cut-out
24W/35W	173	173	128	160x160
2x24W/2x35W	358	173	128	345x160
3x24W/3x35W	489	173	128	475x160



NLED5831 24W 15°



NLED5832A 70W 24°