

NPNLED451 v2 series

Upgraded high lumen output LED panel



Recessed kit



Surface kit



Suspension kit



APPLICATIONS

- General commercial use
- Offices
- Schools
- Hospitals

CONSTRUCTION

- Seamless aluminium frame
- White powder coated finish
- PP (Polypropylene) diffuser
- Separate low-flicker driver included

TECHNICAL DETAILS


- SMD LEDs
- Rated life: 30,000 hours

OPTIONS



- Available to be mounted in four different ways:

- **Lay-in:**
On 15-24mm exposed T ceiling grids. No attachments required
- **Pull-up/Recessed:**
In plasterboard ceilings (cut-out needed). Recessed kit (supplied with mounting springs) required. Order this as a separate item
- **Surface mounted:**
Surface mounting kit required. Order this as a separate item
- **Suspended:**
Wire suspension kit required. Order this as a separate item

Dimensions

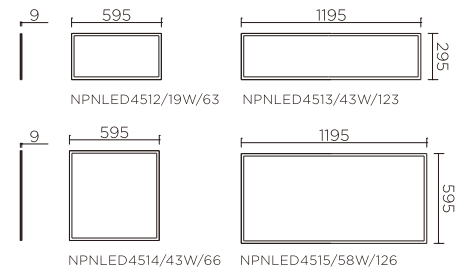

Dimensions (after assembly)

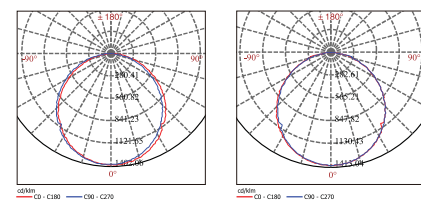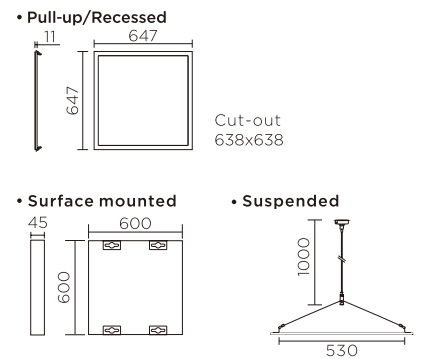

NPNLED4514 43W 4000K NPNLED4514 43W 6000K

Model	Colour temp.	Lumens	CRI	PF
NPNLED4512/19W/63	3000K/4000K/6000K	2,000 lm	>80	>0.9
NPNLED4513/43W/123	3000K/4000K/6000K	4,200 lm	>80	>0.9
NPNLED4514/43W/66	3000K/4000K/6000K	4,200 lm	>80	>0.9
NPNLED4515/58W/126	3000K/4000K/6000K	5,700 lm	>80	>0.9

Accessories	Description
Suspension kit	NPNLED4514 Kit (2pcs*1m/set)
Surface kit	NPNLED4514 Kit (595x595mm)
Recessed kit	NPNLED4514 Kit (595x595mm)