

LED R2835/5050

Slim & flexible LED strip lights



APPLICATIONS

- Cove lighting
- Cornice lighting
- Corridors
- Patios
- Pergolas

TECHNICAL DETAILS


- Choice of SMD 2835 or 5050 LEDs
- Economical version
 - 20,000h rated life
- Standard version
 - 30,000h rated life
- Can be cut every 50mm

CONSTRUCTION

- For use with 12V constant voltage driver
- 5m/roll with no driver

OPTIONS

- **Voltage:** Choice of 12V or 24V version
- **IP rating:** Choice of IP20 or IP65
- **Colour:** Choice of white (with different CCTs), red, green, blue or yellow or RGB.
- For other wattages and outputs please enquire for details
- A wide range of accessories is available as listed below

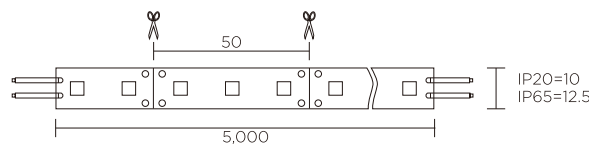

RGB infrared controller and remote

Power connector for single color (with/without plug)



Power connector for RGB color

Solderless RGB color middle connector



Heat shrink

Heat cap End cap



Mounting clip

Solderless single color middle connector

| Model | Colour temp. | Lumens/m | Watts/m | IP | CRI | Rated life |
|----------------|-------------------------|----------|---------|-------|-----|------------|
| LED R2835E/60P | 2700K/3000K/4000K/6500K | 350lm | 4.8W | 20/65 | >80 | 20,000h |
| LED R5050E/60P | 2700K/3000K/4000K/6500K | 750lm | 14.4W | 20/65 | >80 | 20,000h |
| LED R2835/60P | 2700K/3000K/4000K/6500K | 350lm | 4.8W | 20/65 | >80 | 30,000h |
| LED R5050/60P | 2700K/3000K/4000K/6500K | 900lm | 14.4W | 20/65 | >80 | 30,000h |
| LED R5050/60P | RGB | — | 14.4W | 20/65 | >80 | 30,000h |
| LED R5050/60P | R | — | 14.4W | 20/65 | >80 | 30,000h |
| LED R5050/60P | G | — | 14.4W | 20/65 | >80 | 30,000h |
| LED R5050/60P | B | — | 14.4W | 20/65 | >80 | 30,000h |
| LED R5050/60P | Y | — | 14.4W | 20/65 | >80 | 30,000h |