

# BELFRY

Versatile, programmable LED street lights



## APPLICATIONS

- Roads
- Car parks
- Residential areas

## APPLICATION CONDITION

- Temperature: -20°C to 45° C
- Humidity: up to 95 %

## TECHNICAL DETAILS

- CREE XP-G3 LEDs
- Rated life: 30,000 hours

## CONSTRUCTION


- Low copper die-cast aluminium housing and heatsink
- Tempered glass front cover
- 30KV/15KA SPD
- Philips DALI driver
- ANSI C136.41 7 pin receptacle
- Coastal finish
- Tool-free access
- Weight:
  - 35W, 4.3kg
  - 45W, 7.2kg
  - 125W, 11.8kg
  - 155W, 11.9kg
  - 170W, 12kg
  - 180W and 260W, 14.3kg

## OPTIONS

- **CCT:** Choice of 3000K, 4000K or 5000K
- **Dimming:** Fixed output as standard, dimming option are available for digital dimming
- **Version:** Choice of the standard version or NEMA socket version



Photo-cell

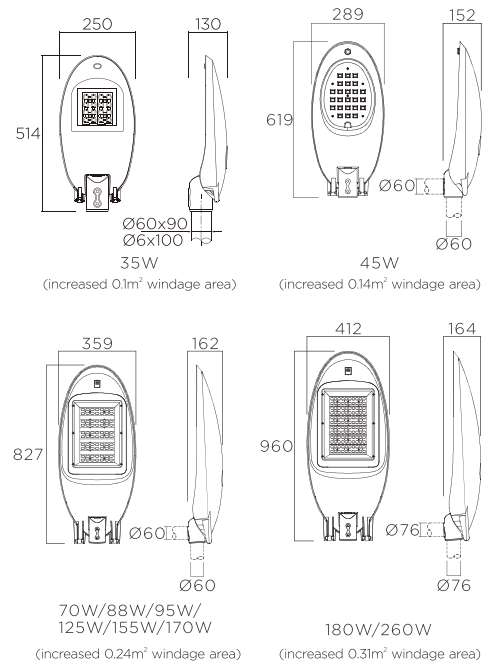

Model	Watts	Colour temp.	Lumens	CRI
NBF35UC140BSGA7CDLP	35W	4000K	4,000 lm	>70
NBF45UC140ESGA7CDLP	45W	4000K	5,750 lm	>70
NBF70UC140ESGA7CDLP	70W	4000K	9,256 lm	>70
NBF88UC140ESGA7CDLP	88W	4000K	10,560 lm	>70
NBF95UC140ESGA7CDLP	95W	4000K	12,290 lm	>70
NBF125UC140CSGA7CDLP	125W	4000K	14,500 lm	>70
NBF155UC140CSGA7CDLP	155W	4000K	18,500 lm	>70
NBF170UC140ESGA7CDLP	170W	4000K	23,000 lm	>70
NBF180UC140GSGA7CDLP	180W	4000K	25,000 lm	>70
NBF260UC140ESGA7CDLP	260W	4000K	33,000 lm	>70

