



NCNLED301



APPLICATIONS

- Porches + entrances
- Corridors
- Under-canopy lighting


CONSTRUCTION

- Die-cast aluminium housing
- Powder coated surface treatment
- Tempered glass diffuser
- LED driver included
- Choice of three finishes:
 - Black (similar to RAL 7021)
 - Dark grey (similar to RAL 7037)
 - Light grey (similar to RAL 7023)


TECHNICAL DETAILS

- CREE COB LED
- Rated life: 30,000 hours


NCNLED301 8W




NCNLED301 12W



Model	Watts	Colour temp.	Lumens	CRI	PF	Beam angle
NCNLED301 8W	8W	3000K/4000K/6000K	640 lm	>70	>0.9	30°
NCNLED301 12W	12W	3000K/4000K/6000K	960 lm	>70	>0.9	85°

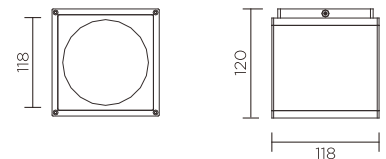

NCNLED301 8W

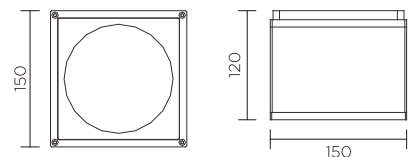

NCNLED301 12W