

NHLED304E

Cost-effective DOB highbay



APPLICATIONS

- Industrial production areas
- Warehouses
- Exhibition halls

CONSTRUCTION


- Die-casting aluminium housing
- Aluminium 6063 reflector
- LED driver on board

TECHNICAL DETAILS

- SMD LEDs
- Rated life: 30,000 hours

OPTIONS

- Check availability before ordering

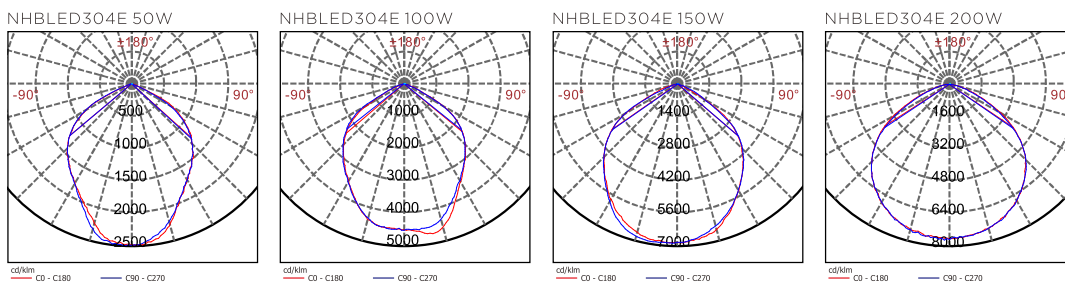

Model	Watts	Colour temp.	Lumens	CRI
NHLED304E 50W	50W	3000K/4000K/6000K	4,950 lm	>70
NHLED304E 100W	100W	3000K/4000K/6000K	9,940 lm	>70
NHLED304E 150W	150W	3000K/4000K/6000K	15,370 lm	>70
NHLED304E 200W	200W	3000K/4000K/6000K	20,530 lm	>70

