

# NLED 49 series



### APPLICATIONS

- Parking garages
- Industrial premises
- Storage facilities

### CONSTRUCTION


- Constant current LED driver
- PC housing and opal PC diffuser

### TECHNICAL DETAILS

- SMD LEDs
- Rated life: 30,000 hours

### OPTIONS

- **Version:** Choice of the standard version, microwave or PIR version
- **Emergency:** Choice of non-emergency, 1.5 hours emergency or 3 hours emergency version

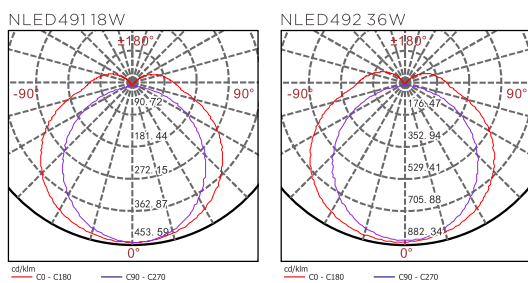

Model	Watts	Colour temp.	Lumens	CRI
NLED491 18W	18W	3000K/4000K/6000K	2,000 lm	>80
NLED492 36W	36W	3000K/4000K/6000K	3,800 lm	>80
NLED493 54W	54W	3000K/4000K/6000K	5,200 lm	>80

