

NLED582 series

Multiple light with several wattages and sizes



NLED5823



NLED5821



NLED5822



APPLICATIONS

- Retails stores
- Showrooms
- Fashion shops

TECHNICAL DETAILS


- COB LEDs
- Rated life: 30,000 hours

CONSTRUCTION

- Die-cast aluminium bezel
- Steel housing
- Powder coated finish
- Adjustable angle: horizontal 350°, vertical 30°
- One-head, two-head and three-head designs
- Separate driver for each head included


OPTIONS

- **Beam angle:** Choice of 15° or 24°

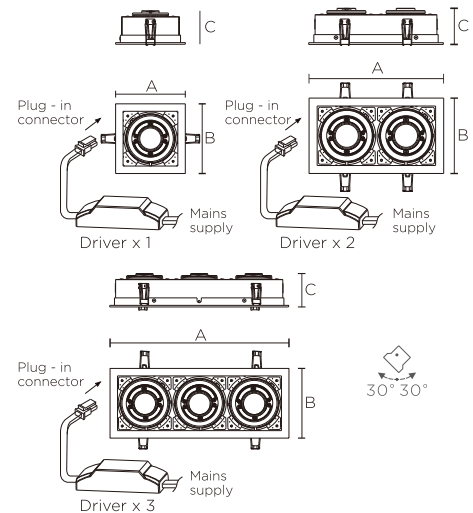


Watts	A	B	C	Cut-out
6W	131	131	63	120x120
2x6W	233	131	63	120x223
3x6W	335	131	63	120x325
9W/12W	131	131	78	121x121
2x9W/2x12W	233	131	78	120x223
3x9W/3x12W	235	131	78	120x325
20W	131	131	86	121x121
2x20W	233	131	86	120x223
3x20W	335	131	86	120x325

Model	Colour temp.	Lumens	CRI	PF	Beam angle
NLED5821A 6W	3000K/4000K/5700K	450 lm	>80	>0.9	15°/24°
NLED5822A 2x6W	3000K/4000K/5700K	900 lm	>80	>0.9	15°/24°
NLED5823A 3x6W	3000K/4000K/5700K	1,350 lm	>80	>0.9	15°/24°
NLED5821B 9W	3000K/4000K/5700K	500 lm	>80	>0.9	15°/24°
NLED5822B 2x9W	3000K/4000K/5700K	1,000 lm	>80	>0.9	15°/24°
NLED5823B 3x9W	3000K/4000K/5700K	1,500 lm	>80	>0.9	15°/24°
NLED5821C 12W	3000K/4000K/5700K	720 lm	>80	>0.9	15°/24°
NLED5822C 2x12W	3000K/4000K/5700K	1,440lm	>80	>0.9	15°/24°
NLED5823C 3x12W	3000K/4000K/5700K	2,160 lm	>80	>0.9	15°/24°
NLED5821D 20W	3000K/4000K/5700K	1,500 lm	>80	>0.9	15°/24°
NLED5822D 2x20W	3000K/4000K/5700K	3,000 lm	>80	>0.9	15°/24°
NLED5823D 3x20W	3000K/4000K/5700K	4,500 lm	>80	>0.9	15°/24°



NLED5821B 9W 24°



NLED5821D 20W 24°